




### Hydrophilic Bicomponent PE/PET Fiber

Layo has been dealing with various specifications of Hydrophilic Bicomponent PE/PET Fiber, and we are on the way to develop new technology to follow the market trends of Hydrophilic Bicomponent PE/PET Fiber, which makes our product lists always fresh and alternatively. We have been committed to stable quality, competitive prices. With the advantages of flexible order policy, professional international trade services, customized product solutions, authoritative test reports and certificates, to meet

the diverse needs of customers.

Layo is a professional leader China **Hydrophilic Bicomponent PE/PET Fiber**, Hydrophobic Bicomponent PE/PET Fiber, Hydrophilic Bicomponent PP/PET Fiber manufacturer with high quality and reasonable price. Welcome to contact us.

China based supplier of **Hydrophilic Bicomponent PE/PET Fiber**: sheath/core concentric structure based bicomponent fiber, with a property of low melting point sheath-Polyethylene and core material-Polyethylene Terephthalate, hydrophilic or durable (permanent hydrophilic) spin finish, by adding  $TiO_2$  to raise the whiteness of fiber.

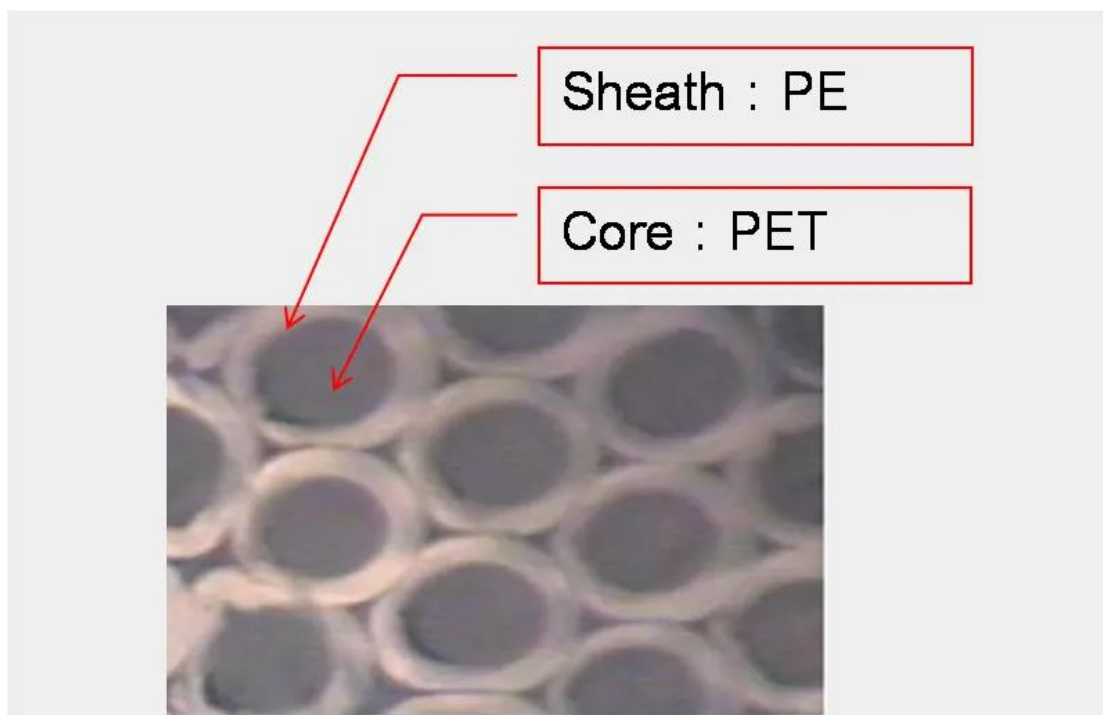

### Product Technical Indicators

Standard TDS of 2den 38mm **Standard Hydrophilic Bicomponent PE/PET Fiber**

| Characteristic    | Unit    | Min  | Max  | Test Method    | Remark     |
|-------------------|---------|------|------|----------------|------------|
| Linear Density    | dtex    | 2.2  | 2.46 | GB/T14335-2008 |            |
| Cut length        | mm      | 37   | 39   | GB/T14336-2008 |            |
| Tenacity at peak  | cn/dtex | 2.3  | 3.08 | GB/T6504-2017  |            |
| Elogation at peak | %       | 40   | 80   | GB/T14337-2008 |            |
| Crimp n.          | n./10mm | 10.5 | 13.5 | GB/T14328-2008 | Adjustable |
| Spin finish       | %       | 0.3  | 0.4  | GB/T6504-2017  | Adjustbale |

### Product Specification Details, And Precise Application

China based supplier of **Hydrophilic Bicomponent PE/PET Fiber** It is an ideal fiber for thermal bonding nonwoven fabrics which are widely used for hygiene products, such as femcare and baby care. Below the specification range:

Fiber denier: 1.2dn ~ 6dn,

Main cut length: 38mm or 51mm,

Luster: raw white/semi dull or full dull,

Spin finish: standard hydrophilic or durable(permanent hydrophilic),

Pigment available: green/blue/purple/camel etc

### Product Production And Delivery Display Diagram

